



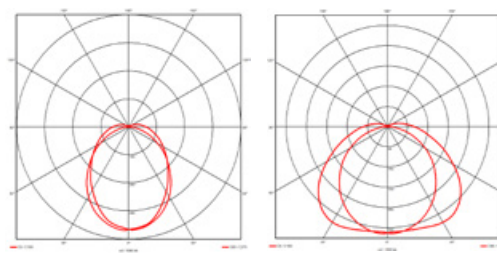

**AYE** LED

A surface, trunking mounted or suspended linear luminaire with either a wide or narrow LED specific opalised optic. Supplied with fixed output driver as standard, with DALI or Switchdim available on request. End mounted daylight and presence detectors are available to enhance energy savings. Manual test, self test and DALI test emergency conversions complete the range.

- Wide or narrow LED specific diffuser to ensure no LED 'spotting'.
- Luminaire can be surface mounted, trunking mounted or suspended.
- Available in 1200 and 1500mm lengths.
- Ideal for use in classrooms, corridors, back of house areas.
- Nominal lumen outputs are shown in the tables, but alternative preset outputs are available in the range 1600 lumens (1200mm length) up to 9000 lumens (1500mm length).
- Available with fixed output, DALI, DSI or Switchdim drivers.
- Standard, self test and DALI reporting 3 hour maintained emergency conversions are available.
- Colour temperature – available in 3000K and 4000K versions.
- CRI 80 as standard, CRI 90 available on request.
- Finished white (RAL9010) as standard, other colours available on request.
- Predicted lifetime >50,000 hours.
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty.

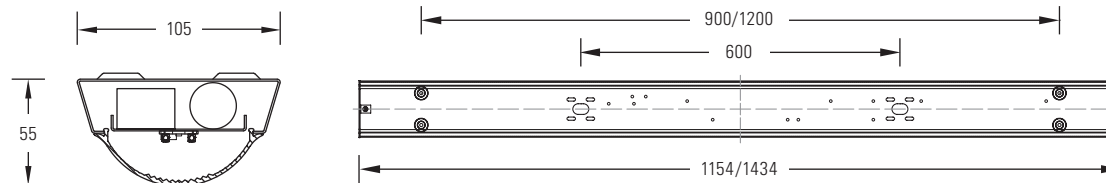

Narrow polar curve

Wide polar curve

Catalogue No.	Nominal Length (mm)	Distribution	LED Flux (Lumen)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	Weight (Kg)
AYE/12/F/52/4K/W	1200	Wide	5200	3692	30.2	33	111	4000K	4
AYE/12/F/60/4K/W	1200	Wide	6000	4260	35.9	39	108	4000K	4
AYE/12/F/52/4K/N	1200	Narrow	5200	3640	30.2	33	110	4000K	4
AYE/12/F/60/4K/N	1200	Narrow	6000	4200	35.9	39	106	4000K	4
AYE/15/F/65/4K/W	1500	Wide	6500	4615	37.7	41	111	4000K	5
AYE/15/F/75/4K/W	1500	Wide	7500	5325	44.9	49	108	4000K	5
AYE/15/F/65/4K/N	1500	Narrow	6500	4550	37.7	41	110	4000K	5
AYE/15/F/75/4K/N	1500	Narrow	7500	5250	44.9	49	106	4000K	5

**Colour Temperature:** To specify 3000K colour temperature, replace '4K' in the catalogue number with '3K': e.g. AYE/12/F/60/4K/W  
**Dimmable Drivers:** To specify DALI driver, replace 'F' in the catalogue number with 'X': e.g. AYE/12/X/60/4K/W  
 To specify DALI driver wired for Switchdim operation, replace 'F' in the catalogue number with 'S': e.g. AYE/15/S/60/4K/W