

BLAYDE LED

A 600x600mm recessed LED luminaire for use in offices and general areas. 2 or 3 individual optics with option of flush or 'dropped' opalised TP(a) diffusers.

- Provides an opalised blade of light effect. Available in other size options on request.
- Body in white (RAL9010) designed to suit accessible suspended ceiling systems.
- Non modular plasterboard versions on request.
- Available in fixed output, DALI or Switchdim operation.
- Colour rendering index Ra >80.
- Predicted lifetime >50,000 hours.
- Colour temperature – available in 3000K and 4000K versions.
- No ultra violet or infra red emissions.
- Standard and self test 3 hour maintained emergency conversions are available.
- Photometric data available in Eulumdat format on request or via Relux website.
- Additional nightlight optics can be specified. Please contact us for more information.
- Nominal lumen outputs are shown in the tables, but alternative preset outputs are available, at special request, in the range 2100 to 8000 lumens for 3 optic version.
- Standard ITAB Prolight LED warranty (see page 161).

Dropped Diffusers: Add 'D' to catalogue number: e.g. BLAD/662/F/26/4K


Dimmable Drivers: To specify DALI driver replace 'F' in catalogue number with 'X': e.g. BLA/662/X/44/3K

To specify DALI driver wired for Switchdim operation replace 'F' in catalogue number with 'S': e.g. BLA/663/S/39/4K

Emergency Conversion: To specify 3 hour maintained emergency packs, add 'E' to catalogue number: e.g. BLA/662/F/26E/3K

Self Test Emergency Conversion: To specify 3 hour maintained self test emergency packs, add 'ES' to catalogue number:

e.g. BLA/662/F/44ES/4K

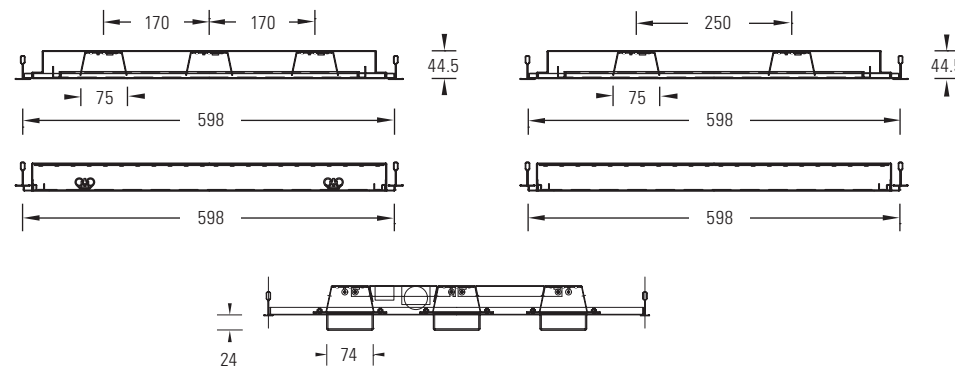

Catalogue No.	Mounting	No. of optics	Nominal Dims (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
BLA/662/F/26/3K	Recessed Modular	2	600x600	2600	1456	18.0	80.9	3000K	>80	6.5
BLA/662/F/44/3K	Recessed Modular	2	600x600	4400	2464	29.5	83.5	3000K	>80	6.5
BLA/663/F/39/3K	Recessed Modular	3	600x600	3900	2184	27.0	80.9	3000K	>80	6.5
BLA/663/F/66/3K	Recessed Modular	3	600x600	6600	3696	44.0	84.0	3000K	>80	6.5
BLA/662/F/26/4K	Recessed Modular	2	600x600	2600	1456	16.8	86.7	4000K	>80	6.5
BLA/662/F/44/4K	Recessed Modular	2	600x600	4400	2464	27.6	89.3	4000K	>80	6.5
BLA/663/F/39/4K	Recessed Modular	3	600x600	3900	2184	25.0	87.4	4000K	>80	6.5
BLA/663/F/66/4K	Recessed Modular	3	600x600	6600	3696	42.0	88.0	4000K	>80	6.5