




CRE8 WALL WASH

LED

- Track mounted adjustable wall wash luminaire fitted with a clear prismatic diffuser.
- Ideal for use in retail, classrooms and display areas.
- Nominal lumen outputs are shown in the tables, but alternative preset outputs are available in the range 1200 lumens (900mm length) up to 9000 lumens (1500mm length).
- Available in different sizes 900, 1200 and 1500mm lengths.
- Colour temperature – available in 3000K and 4000K versions.
- CRI 80 as standard, CRI 90 available on request.
- Finished white (RAL9010) as standard, other colours available on request.
- Predicted lifetime > 50,000 hours.
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty.

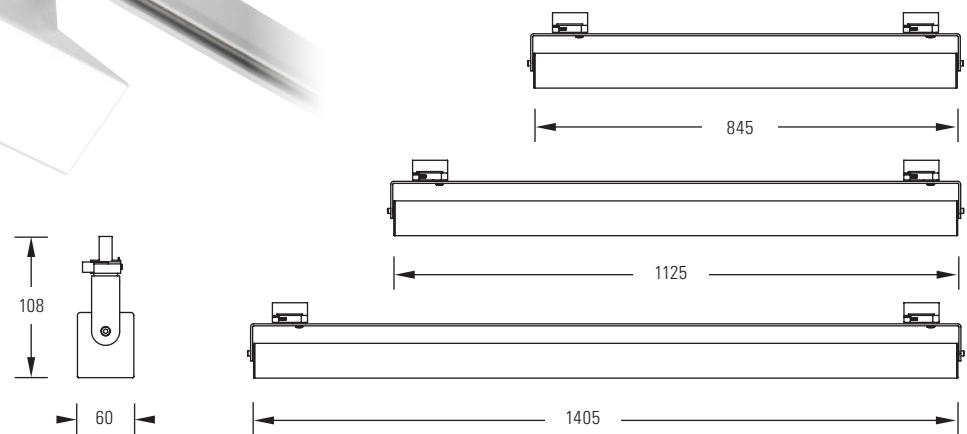

Catalogue No.	Nominal Length (mm)	LED Flux (Lumen)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp
CRE8T/09/F/39/4K	900	3900	2200	22.6	25	88	4000K
CRE8T/09/F/45/4K	900	4500	2538	27.0	30	85	4000K
CRE8T/12/F/52/4K	1200	5200	2933	30.2	33	88	4000K
CRE8T/12/F/60/4K	1200	6000	3384	35.9	39	86	4000K
CRE8T/15/F/65/4K	1500	6500	3666	37.7	41	88	4000K
CRE8T/15/F/75/4K	1500	7500	4230	44.9	49	86	4000K

Colour Temperature: To specify 3000K colour temperature replace '4K' in the catalogue number with '3K': e.g. CRE8T/09/F/60/3K