
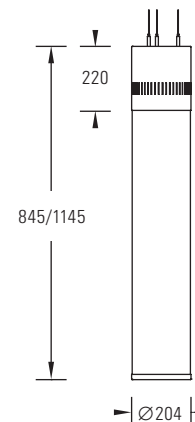


CHUTE LED

A contemporary LED pendant offering significant energy and maintenance savings when compared with conventional compact fluorescent pendants.

- Colour rendering index Ra >80.
- Predicted lifetime >50,000 hours.
- Available with solid underside to provide a wide distribution or with an open tube underside to provide a direct distribution.
- Photometric data available in Eulumdat format on request or via Relux website.



o/a Length (mm)	Catalogue No.	LED Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt		Colour Temp	CRI	Weight (Kg)
					with Solid Tube LOR = 74%	with Open Tube LOR = 79%			
845	CHTSW/11/4K/S	1100	8.6	9.9	82.2	87.8	4000K	>80	4.3
845	CHTSW/20/4K/S	2000	16.0	18.4	80.4	85.9	4000K	>80	4.3
845	CHTSW/30/4K/S	3000	23.6	27.1	81.9	87.5	4000K	>80	4.3
845	CHTSW/50/4K/S	4600	41.1	47.3	72.0	76.9	4000K	>80	4.3
1145	CHTLW/11/4K/S	1100	8.6	9.9	82.2	87.8	4000K	>80	4.5
1145	CHTLW/20/4K/S	2000	16.0	18.4	80.4	85.9	4000K	>80	4.5
1145	CHTLW/30/4K/S	3000	23.6	27.1	81.9	87.5	4000K	>80	4.5
1145	CHTLW/50/4K/S	4600	41.1	47.3	72.0	76.9	4000K	>80	4.5

Colour Temperature: For colour 3000K replace '4K' in catalogue number with '3K': e.g. CHTLW/30/3K/S

Supplied with solid spun aluminium housing as standard. Available as an open tube option, replace 'S' in catalogue number with 'OB': e.g. CHTSW/11/4K/OB

SPECIFICATION

- Body Entry:** Aluminium control gear housing finished in white as standard. Other colours are available on request.
- Diffuser:** Manufactured from UV stabilised acrylic. This material provides an even soft glow appearance to the diffuser.
- Drivers:** Option of fixed output or DALI (wired for DALI or Switchdim operation).
Add suffix '**D**' to specify DALI driver wired for DALI control: e.g. CHT/20**D**/4K
Add suffix '**DW**' to specify DALI driver wired for Switchdim operation: e.g. CHT/20**DW**/4K
- Emergency:** Not currently available – please check with our technical department.
- Suspensions:** 3 point adjustable steel wire suspensions. Please specify required length to nearest metre.
- Warranty:** Standard ITAB Prolight LED warranty (see page 161).