



CLASSIC / PRIME BULKHEADS


CLASSIC LED

SPECIFICATION

- Body:** IP65 corrosion and vandal resistant, die-cast aluminium body and diffuser retaining ring available in white, black and silver (RAL9006) finish.
- Diffuser:** Impact resistant, opal polycarbonate UV stabilised diffuser.
- Emergency:** Centrally mounted LED on a separate circuit can be used for non maintained emergency use (120 lumens). Also available in self test emergency versions on request:
 Add suffix **'E'** to specify emergency: e.g. CCF0*/1750**E**/4K/OP/B or PRM*/1750**E**/4K/OP/B
 Add suffix **'ES'** to specify self test emergency: e.g. CCF0*/1750**ES**/4K/OP/B
 Add suffix **'ED'** to specify DALI reporting self test emergency: e.g. CCF0*/1750**ED**/4K/OP/B
- Dimmable Drivers:** Option of fixed output (standard), DALI or Switchdim control.
 Add suffix **'D'** to specify DALI driver or suffix **'DW'** to specify Switchdim:
 e.g. CCF0*/1750**D**/4K/OP/B; PRM*/1750**D**/4K/OP/B
 or CCF0*/1750**DW**/4K/OP/B; PRM*/1750**DW**/4K/OP/B
- Photocell:** Integral photocell options are available – add suffix **'PC'** to catalogue number:
 e.g. CCF0C/1750/4K/OP/**BPC** or PRM*/1750/4K/OP/**BPC** (not available with Classic Slim).
- Presence:** Microwave detector available, add suffix **'PD'** to catalogue number:
 e.g. CCF0C/1750/4K/OP/**BPD**
- Warranty:** Standard ITAB Prolight LED warranty (see page 161).

- Predicted lifetime >50,000 hours.

CCFOC – Circular Opal Diffuser

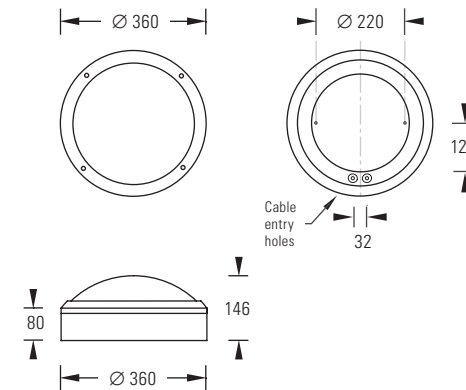

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
CCFOC/1750/4K/OP/B	Ø 360	1900	1193	11.2	12.9	92.6	4000K	>80	4.5
CCFOC/2400/4K/OP/B	Ø 360	2500	1570	16.5	19.0	82.7	4000K	>80	4.5
CCFOC/3500/4K/OP/B	Ø 360	3500	2198	22.5	25.9	84.9	4000K	>80	4.5


To specify a white version, replace **'B'** in catalogue number with **'W'**: e.g. CCF0C/2400/4K/OP/**W**
 To specify a silver version, replace **'B'** in catalogue number with **'S'**: e.g. CCF0C/2400/4K/OP/**S**




CLASSIC HOOD LED

CLASSIC HALO LED

CCFOH – Circular Opal Diffuser with Hood

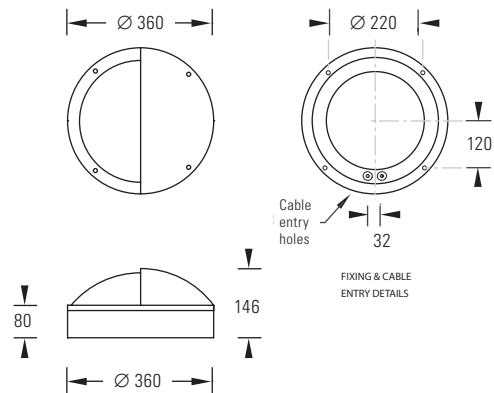

CCFOB – Circular Opal Diffuser with Backlight

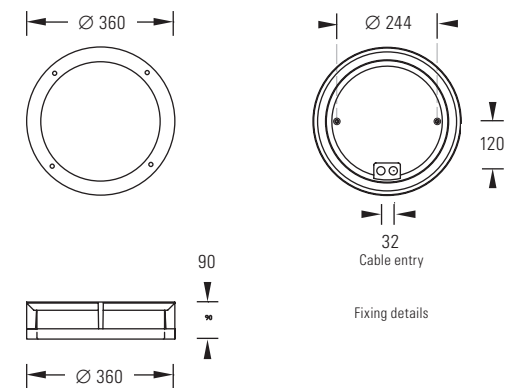

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
CCFOH/1750/4K/OP/B	Ø 360	1900	342	11.2	12.9	26.6	4000K	>80	4.5
CCFOH/2400/4K/OP/B	Ø 360	2500	450	16.5	19.0	23.7	4000K	>80	4.5
CCFOH/3500/4K/OP/B	Ø 360	3500	630	22.5	25.9	24.3	4000K	>80	4.5

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
CCFOB/1750/4K/OP/B	Ø 360	1900	1119	11.2	12.9	86.9	4000K	>80	4
CCFOB/2400/4K/OP/B	Ø 360	2500	1473	16.5	19.0	77.6	4000K	>80	4
CCFOB/3500/4K/OP/B	Ø 360	3500	2062	22.5	25.9	79.7	4000K	>80	4

To specify a white version, replace 'B' in catalogue number with 'W': e.g. CCFOH/2400/4K/OP/W
 To specify a silver version, replace 'B' in catalogue number with 'S': e.g. CCFOH/2400/4K/OP/S

To specify a white version, replace 'B' in catalogue number with 'W': e.g. CCFOB/2400/4K/OP/W
 To specify a silver version, replace 'B' in catalogue number with 'S': e.g. CCFOB/2400/4K/OP/S