


Typical Special Colour Finish




Prismatic Polycarbonate Diffuser



## CYMBAL LED

A range of wall, ceiling mounted, or semi-recessed circular LED luminaires designed for general purpose use in corridors, staircases, entrance areas, toilets and stores.

- All diffusers are manufactured from polycarbonate and integral emergency versions are suitable for defined escape routes (comply with 850°C hot wire test).
- Predicted lifetime >50,000 hours.
- Standard ITAB Prolight LED warranty (see page 161).

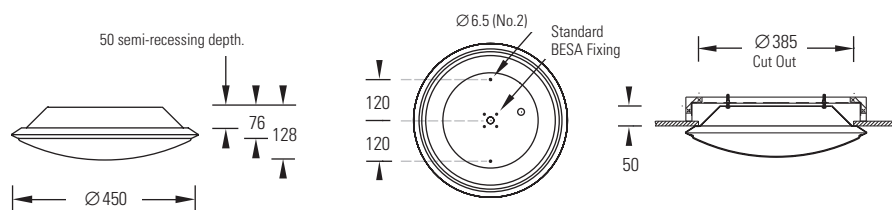

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
CCSW/1750/4K/OP	Ø 450	1900	1340	11.2	12.9	104.0	4000K	>80	4
CCSW/2400/4K/OP	Ø 450	2500	1760	16.5	19.0	92.8	4000K	>80	4
CCSW/3500/4K/OP	Ø 450	3500	2470	22.5	25.9	95.5	4000K	>80	4

### SPECIFICATION

- Body:** Spun aluminium, finished in epoxy powder coated white as standard. Special colours can be supplied on request, please specify required finish using RAL colour code. Overall diameter = 450mm
- Gear Tray:** Completely removable for ease of installation and maintenance.
- Diffuser:** Opal Polycarbonate
- Nightlight/ Emergency:** Centrally mounted LED on a separate circuit can be used for nightlighting (120 lumens) and/or non maintained emergency use (120 lumens). Also available in self test emergency versions on request:  
 Add suffix '**N**' to specify nightlight: e.g. CCSW/1750**N**/4K/OP  
 Add suffix '**E**' to specify emergency: e.g. CCSW/1750**E**/4K/OP  
 Add suffix '**EN**' to specify emergency and nightlight: e.g. CCSW/1750**EN**/4K/OP  
 Add suffix '**ES**' to specify self test emergency: e.g. CCSW/1750**ES**/4K/OP  
 Add suffix '**ED**' to specify DALI reporting emergency: e.g. CCSW/1750**ED**/4K/OP
- Dimmable Drivers:** Option of fixed output (standard), DALI or Switchdim control.  
 Add suffix '**D**' to specify DALI driver or suffix '**DW**' to specify Switchdim:  
 e.g. CCSW/1750**D**/4K/OP or CCSW/1750**DW**/4K/OP
- Fixing:** Central BESA box. Semi-recessing kit available for all versions.
- Semi-Recessed:** Semi-recessing kit. Specify catalogue number: **CCS/SRK**