


CYMBAL ANTI-LIGATURE

LED

A range of ceiling or wall mounted circular LED luminaires designed for areas requiring vandal resistant properties. When installed with anti-pick mastic around the base the luminaire is suitable for anti-ligature applications.

- Available in 450 or 550mm diameter bodies, fixed output or DALI drivers, standard maintained or self test emergency options.
- Nightlight facilities are also available.
- All diffusers are manufactured from polycarbonate and emergency versions are suitable for defined escape routes (comply with 850°C hot wire test).
- Predicted lifetime >50,000 hours.

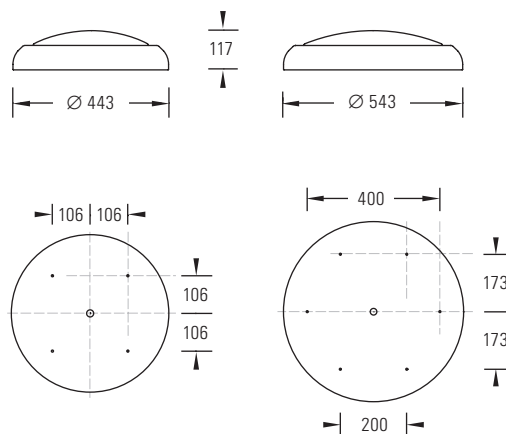

Catalogue Number	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
CVRSW/1750/4K/OP	Ø 443	1900	874	11.2	12.9	67.9	4000K	>80	6.5
CVRSW/2400/4K/OP	Ø 443	2500	1150	16.5	19.0	60.6	4000K	>80	6.5
CVRSW/3500/4K/OP	Ø 443	3500	1610	22.5	25.9	62.2	4000K	>80	6.5
CVRLW/1750/4K/OP	Ø 543	1900	874	11.2	12.9	67.9	4000K	>80	7.2
CVRLW/2400/4K/OP	Ø 543	2500	1150	16.5	19.0	60.6	4000K	>80	7.2
CVRLW/3500/4K/OP	Ø 543	3500	1610	22.5	25.9	62.2	4000K	>80	7.2

SPECIFICATION

- Body:** Finished in epoxy powder coated white (RAL9016) as standard.
- Gear Tray:** Completely removable for ease of installation and maintenance.
- Diffuser:** Opal polycarbonate secured to the body via tamper proof screws.
- Nightlight/ Emergency:** Centrally mounted LED on a separate circuit can be used for nightlighting (120 lumens) and/or Non maintained emergency use (120 lumens). Also available in self test emergency versions on request:
 Add suffix '**N**' to specify nightlight: e.g. CVR*W/1750**N**/4K/OP
 Add suffix '**E**' to specify emergency: e.g. CVR*W/1750**E**/4K/OP
 Add suffix '**EN**' to specify emergency and nightlight: e.g. CVR*W/1750**EN**/4K/OP
- Dimmable Drivers:** Option of fixed output (standard), DALI or Switchdim control.
 Add suffix '**D**' to specify DALI driver or suffix '**DW**' to specify Switchdim: e.g. CVR*W/1750**D**/4K/OP or CVR*W/1750**DW**/4K/OP
- Warranty:** Standard ITAB Prolight LED warranty (see page 161).