

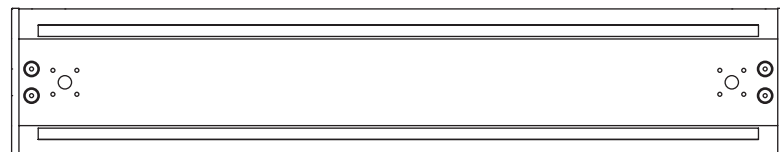




DOK LED

A suspended low profile luminaire utilising the latest LED technology with diffusion lens and specular cross blade louvre.

- Semi opalised LED lens ensures maximum efficiency while removing LED 'spotting'.
- Exceptionally low luminance of 1300 cd/m² at 65° for LED lumen package of 6000 lumens.
- UGR < 19 in most applications making DOK suitable for use in office areas with high luminance screens.
- The perforated body allows for uplight.
- Supplied with fixed output driver as standard. DALI / DSI / Switchdim available on request.
- Available with stand alone, self test or DALI reporting integral 3 hour emergency kit.
- Colour temperature – available in 3000K and 4000K versions.
- Colour rendering index Ra >80.
- Predicted lifetime >50,000 hours.
- Nominal outputs are shown in the tables, but alternative preset outputs are available, at special request, in the range 3,200 – 9,400 lumens.
- Photometric data available in Eulumdat format on request or via Relux website.
- No UV or IR emissions.
- Standard ITAB Prolight LED warranty (see page 161).



Catalogue No.	Nominal Length (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
DOK/12/F/52/4K	1200	5200	3874.0	29.9	34.4	113	4000K	>80	4.5
DOK/12/F/67/4K	1200	6720	5006.4	40.9	46.9	107	4000K	>80	4.5
DOK/15/F/65/4K	1500	6500	4842.5	37.4	42.4	114	4000K	>80	5.5
DOK/15/F/84/4K	1500	8400	6258.0	51.3	59.2	106	4000K	>80	5.5

Colour Temperature: For colour 3000 Kelvin, replace '4K' in the catalogue number with '3K': e.g. DOK/12/F/52/3K
Dimmable Drivers: To specify DALI driver, replace 'F' in the catalogue number with 'X': e.g. DOK/12/X/52/4K
 To specify DALI driver wired for Switchdim operation, replace 'F' in the catalogue number with 'S': e.g. DOK/12/S/52/4K
Emergency Conversion: To specify 3 hour maintained emergency packs, add 'E' to catalogue number: e.g. DOK/15/F/65E/4K
Self Test Emergency Conversion: To specify 3 hour maintained self test emergency packs, add 'ES' to catalogue number: e.g. DOK/12/F/52ES/4K