




ELL-T-R2A

LED

- LED emergency module suitable for direct installation in ceilings.
- Complete set with integrated electronics, LED module, heat sink, optics and battery.
- Supplied with anti-panic, escape route and spot illumination lenses.
- Standard, self test and DALI reporting versions are available.
- Cut out 40mm dia.
- Only 80mm recessing depth required.
- 5 year guarantee (LED driver).
- 3 year guarantee (Battery).
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty.

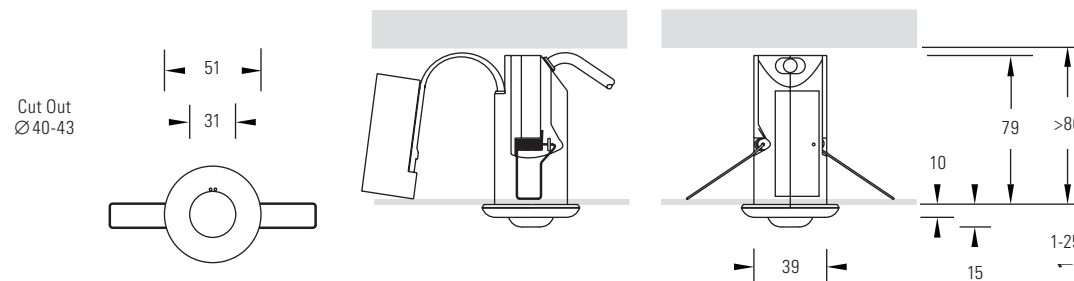

Catalogue No.	Test Type	Operation	Luminaire Flux	LED Wattage
ELL/T/R2A/BA/M/2W	Manual Test	Maintained	200	2W
ELL/T/R2A/BA/NM/2W	Manual Test	Non Maintained	200	2W
ELL/T/R2A/ST/M/2W	Self Test	Maintained	200	2W
ELL/T/R2A/ST/NM/2W	Self Test	Non Maintained	200	2W
ELL/T/R2A/PR/M/2W	DALI Test	Maintained	200	2W
ELL/T/R2A/PR/NM/2W	DALI Test	Non Maintained	200	2W

