


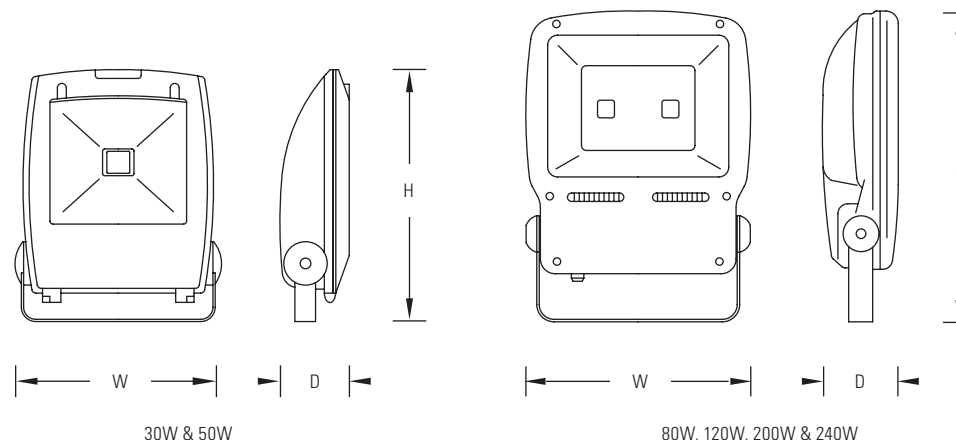


**FLOODLIGHT**

LED 

A family of external IP65 rated floodlights with outputs ranging from 2,850 lumens up to 22,800 lumens. Ideal for use in commercial and industrial applications such as car parks, sports facilities, amenity lighting and security areas.

- Die cast aluminium IP65 body with toughened glass cover.
- IK10 rating.
- Different sizes offering 6 different lumen outputs.
- Colour temperature – 4500K.
- Predicted lifetime >50,000 hours.
- Finished in grey (RAL7004).
- 120° beam angle.
- Adjustable metal stirrup for ease of installation.
- Standard ITAB Prolight LED warranty (see page 161).



See table for dimensions

Catalogue No.	LED Flux (Lumens)	Luminaire System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)	Width (mm)	Height (mm)	Depth (mm)
FL/LED/030/4500K	2747	30.0	91.6	4500K	>80	2.0	220	320	80
FL/LED/050/4500K	4636	50.0	92.7	4500K	>80	3.4	295	340	105
FL/LED/080/4500K	7700	81.6	94.4	4500K	>80	4.3	250	310	95
FL/LED/120/4500K	11400	116.1	98.2	4500K	>80	7.8	335	390	115
FL/LED/200/4500K	20800	205.9	101.0	4500K	>80	14.0	420	490	130
FL/LED/240/4500K	22900	233.6	98.0	4500K	>80	14.0	420	490	130