





KORD LED

A range of surface or suspended linear LED luminaires with direct (90%) and indirect (10%) light distribution.

- 1200 or 1500mm linear versions with high transmission diffusing opalised polycarbonate TP(a) diffusers designed to eliminate LED spotting. LOR = 78%
- Main body is powder coated white (RAL9016).
- Suspended versions supplied with adjustable wire suspensions.
- Continuous system achieved with infill sections. Please contact sales department for more information.
- Available with built-in PIR/Photocell units – further information on request.
- Available in fixed output, DALI, Switchdim and detector controlled operation via in-built sensors.
- Standard, self test and DALI reporting 3 hour maintained emergency conversions are available.
- Colour rendering index Ra >80.
- Colour temperature – available in 3000K and 4000K versions.
- Predicted lifetime >50,000 hours.
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty (see page 161).

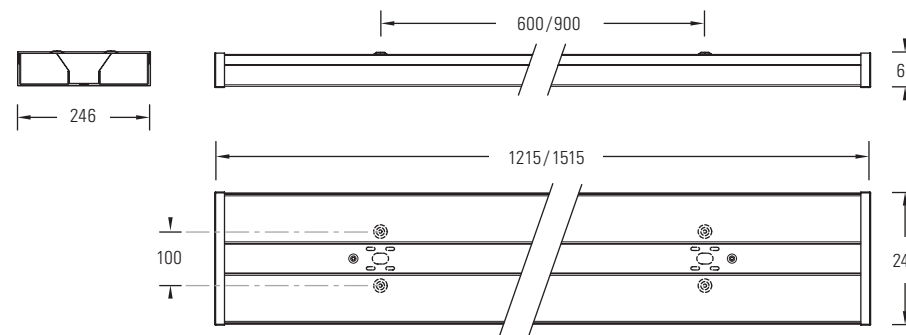

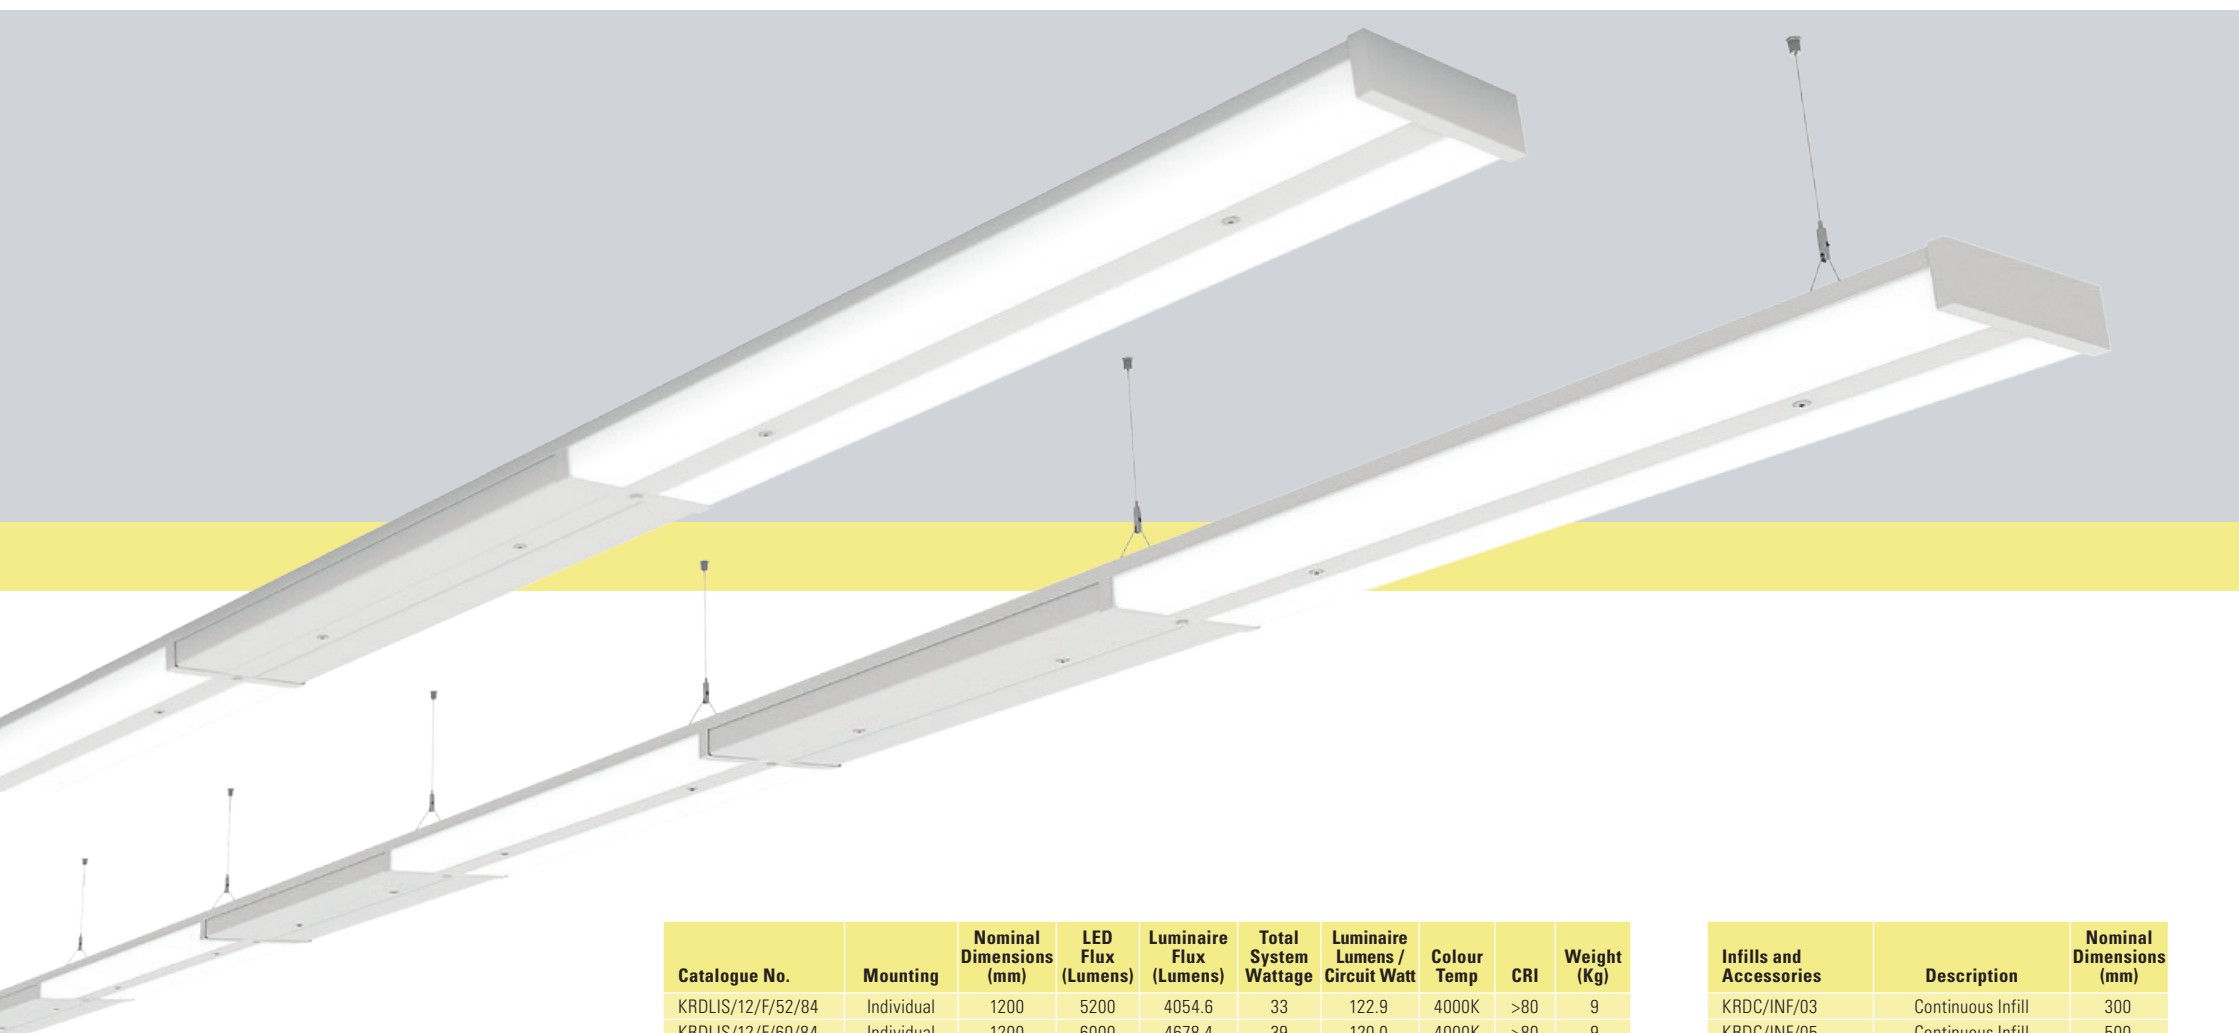

Catalogue No.	Mounting	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
KRDLIS/12/F/52/84	Individual	1200	5200	4054.6	33	122.9	4000K	>80	9
KRDLIS/12/F/60/84	Individual	1200	6000	4678.4	39	120.0	4000K	>80	9
KRDLIS/15/F/65/84	Individual	1500	6500	5068.2	41	123.6	4000K	>80	9
KRDLIS/15/F/75/84	Individual	1500	7500	5848.0	49	119.3	4000K	>80	9
KRDLCs/12/F/52/84	Continuous	1200	5200	4054.6	33	122.9	4000K	>80	10
KRDLCs/12/F/60/84	Continuous	1200	6000	4678.4	39	120.0	4000K	>80	10
KRDLCs/15/F/65/84	Continuous	1500	6500	5068.2	41	123.6	4000K	>80	10
KRDLCs/15/F/75/84	Continuous	1500	7500	5848.0	49	119.3	4000K	>80	10

Dimmable Drivers: To specify DALI driver, replace 'F' in the catalogue number with 'X': e.g. KRDLIS/12/X/52/84
 To specify Switchdim operation, replace 'F' in the catalogue number with 'S': e.g. KRDLIS/12/S/52/84
Emergency: To specify 3 hour maintained emergency packs, add 'E' to catalogue number: e.g. KRDLIS/12/F/52E/84
Self Test Emergency: To specify 3 hour maintained emergency packs, add 'ES' to catalogue number: e.g. KRDLCS/12/F/52ES/84
Colour Temperature: To specify colour 3000K, replace '84' in the catalogue number with '83': e.g. KRDLCS/12/F/52/83
Continuous: We would be pleased to assist with lighting design and layout drawings.

Infills and Accessories	Description	Nominal Dimensions (mm)
KRDC/INF/03	Continuous Infill	300
KRDC/INF/05	Continuous Infill	500
KRDC/INF/08	Continuous Infill	800
KRDC/INF/10	Continuous Infill	1000
KRDC/INF/12	Continuous Infill	1200
KRDC/INF/15	Continuous Infill	1500
KRDC/INFC/090	90° Corner	300
KRDS/EC KIT	End Cap*	
KRDS/JB KIT	Joining Kit*	
SUSKIT/2.0M/2-Y	2.0m Wire Suspension Kit	

*One / end and/or joint required.