


MOON LED

Adjustable recessed downlight ideal for retail or display applications.

- 45° tilt and 355° rotation allows full adjustability.
- Lamp housing of diecast aluminium for optimal cooling and long lifetime.
- Lumen packages of 3000 and 4000 lumens available.
- Ideal for use in display areas.
- Available with beam angles of spot (14°), medium (28°), flood (39°) and wide flood (54°).
- Colour temperature – available in 3000K and 4000K versions.
- CRI 80 as standard, CRI 90 available on request.
- Finished white as standard, black and grey available on request.
- Predicted lifetime > 50,000 hours.
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty.

Cut Out Ø 150
355° Rotation

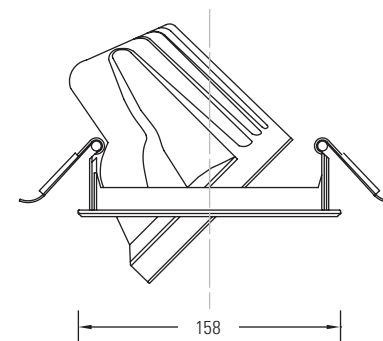

| Catalogue No. | Colour | Beam Angle | Luminaire Flux | Total System Wattage | Luminaire Lumens / Circuit Watt | Colour Temp | CRI |
|--------------------|--------|------------------|----------------|----------------------|---------------------------------|-------------|-----|
| NOR/295-500-10-840 | White | Spot (14°) | 3000 | 26 | 115 | 4000K | 80 |
| NOR/295-501-10-840 | White | Medium (28°) | 3000 | 26 | 115 | 4000K | 80 |
| NOR/295-502-10-840 | White | Flood (39°) | 3000 | 26 | 115 | 4000K | 80 |
| NOR/295-503-10-840 | White | Wide Flood (54°) | 3000 | 26 | 115 | 4000K | 80 |
| NOR/295-505-10-840 | White | Spot (14°) | 4100 | 35 | 117 | 4000K | 80 |
| NOR/295-506-10-840 | White | Medium (28°) | 4100 | 35 | 117 | 4000K | 80 |
| NOR/295-507-10-840 | White | Flood (39°) | 4100 | 35 | 117 | 4000K | 80 |
| NOR/295-543-10-840 | White | Wide Flood (54°) | 4100 | 35 | 117 | 4000K | 80 |

To specify black finish replace '10' in the catalogue number with '20': e.g. NOR/295-500-20-840

To specify grey finish replace '10' in the catalogue number with '30': e.g. NOR/295-507-30-840

Colour Temperature: For colour 3000 Kelvin, replace '40' in the catalogue number with '30': e.g. NOR/295-507-10-830

Colour Rendering: For CRI 90 replace '8' in the catalogue number with '9': e.g. NOR/295-502-10-930