




NOTCH

Recessed wall luminaire with asymmetric dark light reflector.

- Predicted lifetime >50,000 hours.

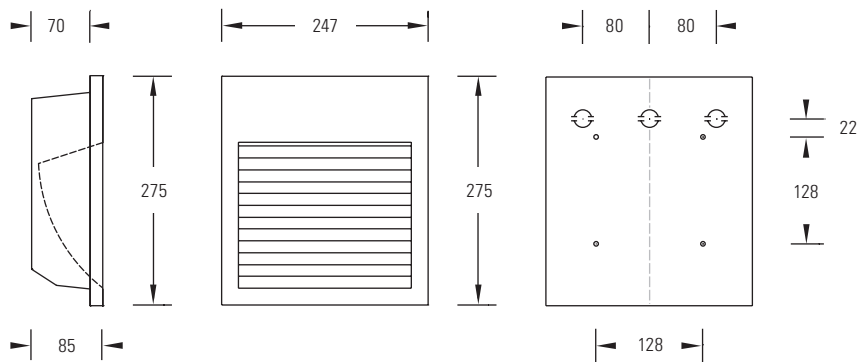

SPECIFICATION

Body: IP65 die-cast aluminium body with sand blasted tempered safety glass and silicon rubber gasket. Supplied with plastic recess housing (247 x 275 x 85 mm).

Available in black, silver (RAL9006) or white finish. To specify silver or white, substitute '**B**' for '**S or W**' in the catalogue number: e.g. NTC**S**/F/13/4K

Control Gear: Integral fixed output driver.

Warranty: Standard ITAB Prolight LED warranty (see page 161).

Catalogue No.	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
NTCB/F/13/4K	1300	260	8.6	9.6	27.0	4000K	>80	3.5
NTCB/F/15/4K	1500	300	10.4	11.6	25.8	4000K	>80	3.5
NTCB/F/17/4K	1700	340	13.4	15.0	22.7	4000K	>80	3.5