



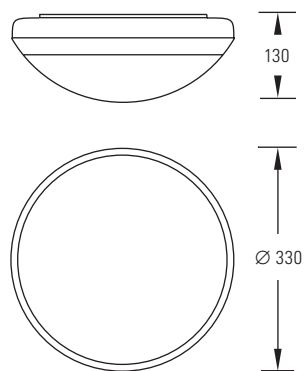

ORORA LED

A range of wall or ceiling mounted IP65 decorative luminaires designed for a wide variety of applications such as corridors, staircases, entrance areas, toilets, stores, showers and bathrooms.

- Predicted lifetime >50,000 hours.

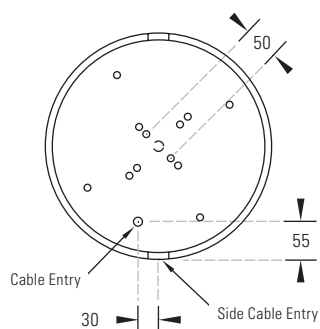

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
ORO/1750/4K/W	Ø 330	1900	950	11.2	12.9	73.8	4000K	>80	2
ORO/2400/4K/W	Ø 330	2500	1250	16.5	19.0	65.9	4000K	>80	2
ORO/3500/4K/W	Ø 330	3500	1750	22.5	25.9	67.6	4000K	>80	2

SPECIFICATION

- Body:** 330mm diameter moulded polycarbonate. Available in white.
- Gear Tray:** Removable for ease of installation and maintenance.
- Diffuser:** Opal polycarbonate. Removed by the use of an integral moulded lever on the base.
- Nightlight/Emergency:** Centrally mounted LED on a separate circuit can be used for nightlighting (120 lumens) and/or non maintained emergency use (120 lumens). Also available in self test emergency versions on request:
 Add suffix '**N**' to specify nightlight: e.g. ORO/1750**N**/4K/W
 Add suffix '**E**' to specify emergency: e.g. ORO/1750**E**/4K/W
 Add suffix '**EN**' to specify emergency and nightlight: e.g. ORO/1750**EN**/4K/W
 Add suffix '**ES**' to specify self test emergency: e.g. ORO/1750**ES**/4K/OP
 Add suffix '**ED**' to specify DALI reporting emergency: e.g. ORO/1750**ED**/4K/OP
- Dimmable Drivers:** Option of fixed output (standard), DALI or Switchdim control.
 Add suffix '**D**' to specify DALI driver or suffix '**DW**' to specify Switchdim:
 e.g. ORO/1750**D**/4K/W or ORO/1750**DW**/4K/W
- Warranty:** Standard ITAB Prolight LED warranty (see page 161).