




OWL CIRCULAR 300 WALL MOUNTED

LED

The OWL 300 circular luminaire can be wall mounted to facilitate an attractive and flexible luminaire for stairwells and other back of house areas. Available with fixed output, DALI, DSI or Switchdim control gear, as well as DALI Reporting, self test or stand-alone emergency. Sensors can also be mounted onto the trim to further enhance energy savings.

- Cast aluminium body section houses the LEDs and acts as a heatsink.
- A sandwich of an acrylic opal panel below a graduated screen printed clear panel ensures the light is transmitted evenly from the perimeter LEDs to the centre of the panel.
- Colour rendering index Ra >80.
- Predicted lifetime >50,000 hours.
- Colour temperature – available in 4000K version as standard.
- Lumen depreciation: 5000 hours – 95.5%
10,000 hours – 90%
- IP40 rated.
- No ultra violet or infra red emissions.
- Tridonic drivers supplied as standard. Available in fixed output, DALI, DSI or Switchdim operations.
- Standard, self test and DALI reporting 3 hour maintained emergency conversions are available.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty (see page 161).

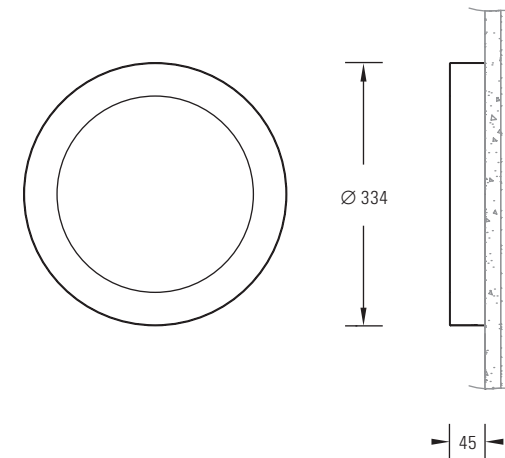

Catalogue No.	Nominal Dimensions (mm)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
OWLC30/15/4K/SM	Ø 334	1500	18	22	68	4000K	>80	3

Dimmable Drivers: To specify DALI driver add 'D' to catalogue number: e.g. OWLC30/15D/4K/SM

To specify DALI driver wired for Switchdim operation, add 'DW' to catalogue number: e.g. OWLC30/15DW/4K/SM

Emergency Conversion: To specify 3 hour maintained emergency packs, add 'E' to catalogue number: e.g. OWLC30/15E/4K/SM