


ROLL

A range of LED external up and downlight wall mounted decorative luminaires, supplied in silver (RAL 9006) as standard with white (RAL9016) and black (RAL9005) versions also available.

Colour 3000K and 4000K versions are available in a range of outputs.

- IP65 rated.
- Predicted lifetime >50,000 hours.
- Available in fixed output, DALI, DSI or Switchdim operation.
- Nominal outputs shown. Outputs in the range 2 x 800 - 2 x 2,300 lumens available on request.

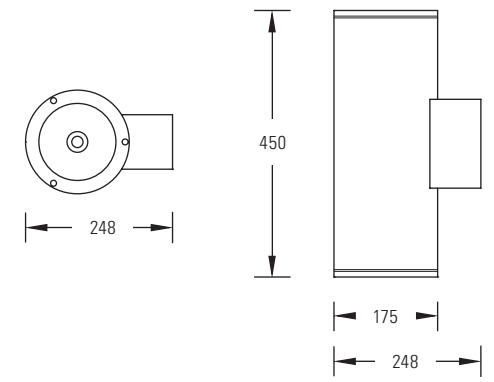

Catalogue No.	Colour	Beam Angle	LED Flux (Lumens)	LED Wattage	Colour Temp	CRI	Weight (Kg)
ROLS/2SLE/12/4K/S	Silver	Spot (12°)	2x1200	14.5	4000K	>80	6
ROLS/2SLE/12/4K/M	Silver	Medium (24°)	2x1200	14.5	4000K	>80	6
ROLS/2SLE/12/4K/F	Silver	Flood (40°)	2x1200	14.5	4000K	>80	6
ROLS/2SLE/20/4K/S	Silver	Spot (12°)	2x2000	24.0	4000K	>80	6
ROLS/2SLE/20/4K/M	Silver	Medium (24°)	2x2000	24.0	4000K	>80	6
ROLS/2SLE/20/4K/F	Silver	Flood (40°)	2x2000	24.0	4000K	>80	6

To specify a white version, replace 'S' in catalogue number with 'W': e.g. ROLW/2SLE/12/4K/S
 To specify a black version, replace 'S' in catalogue number with 'B': e.g. ROLB/2SLE/12/4K/S
Colour Temperature: To specify 3000K colour temperature substitute '4K' in the catalogue number with '3K': e.g. ROLS/2SLE/12/3K/F

SPECIFICATION

Body: Corrosion resistant die cast aluminium alloy body with silicone rubber gasket seal for tempered glass optic.

Output: Lumen packages up to 2,300 lumens up and 2,300 lumens down are available.

Control Gear: Fixed output driver as standard.

Reflector: Spot (12°), medium (24°) and flood (40°) options are available

Emergency: Emergency conversion is not available for this product.

Warranty: Standard ITAB Prolight LED warranty (see page 161).