



PRO-CLEAN T5 SEALED TL5 

- The Pro-Clean range of high specification surface fluorescent IP65 sealed luminaires is designed for applications including hospital clean rooms and operating theatres, food preparation areas, general clean rooms, pharmaceutical applications and secure areas with vandal resistant requirements.
- An aluminium extruded twin frame features a 3 gasket system that ensures the seal is maintained along the whole length of the luminaire.
- All diffusers are manufactured from polycarbonate. Emergency versions comply with the 850°C hot wire test and are suitable for defined escape routes.

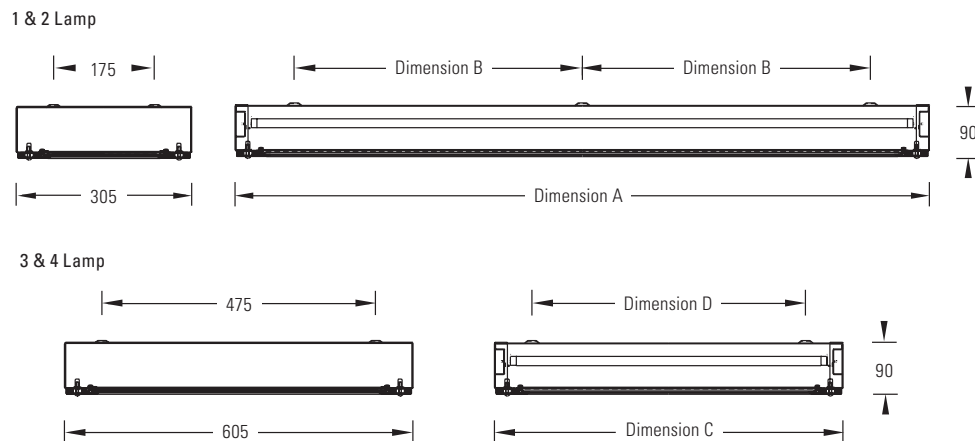


SPECIFICATION

- Body:** Sturdy construction, welded epoxy powder coated steel.
- Frame & Seal:** Epoxy powder coated extruded aluminium with closed cell Ethylene Propylene (EPDM) 3 seal system to IP65. Screw caps supplied as standard.
- Diffusers:** Options include:
- Inverted 3mm prismatic polycarbonate
 - Choice of louvres with clear 3mm polycarbonate
 - 3mm prismatic with 3mm clear polycarbonate sandwich (extra strength with ease of cleaning)
- Gear Tray:** Completely removable for ease of maintenance.
- Control Gear:** **HF** High Frequency Electronic (standard)
HDP Philips 1-10V Analogue
HTCS Tridonic ECO Digital Switchdim
HDPT Philips Digital Touch and Dim
HTCD Tridonic ECO Digital DSI
HTXD Tridonic EXCEL one4all Digital DSI or DALI
HDPD Philips Digital DALI
- To specify required option substitute relevant code into catalogue number: e.g. CRPS/**HDP**/135/X
- Emergency:** **E1** Remote mounted, maintained, 3 hour duration emergency lighting conversion packs are available for all options.
ES Self Test Emergency.
 To specify required option substitute relevant code into catalogue number: e.g. CRPS/HF/228**ES**/PPCP. 24V, 50V or 110V D.C. central battery slave versions can be supplied on request.
- Vandal Proof:** To specify tamper proof screws add suffix '**V**' to catalogue number: e.g. CRPSV/HF/414/PPCP
- Nightlight:** Integral 8W T5 fluorescent nightlight versions are available. Add suffix '**NL**', e.g. CRPS/HF/328**NL**/PP
- Others:** T5 high output and T8 versions available to special order.

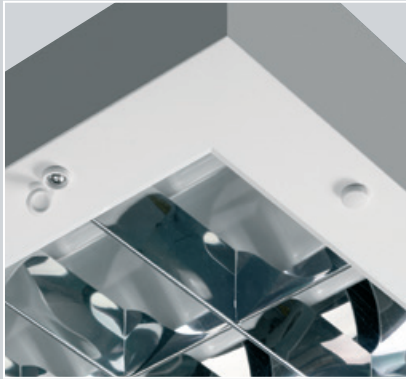

Screw caps as standard

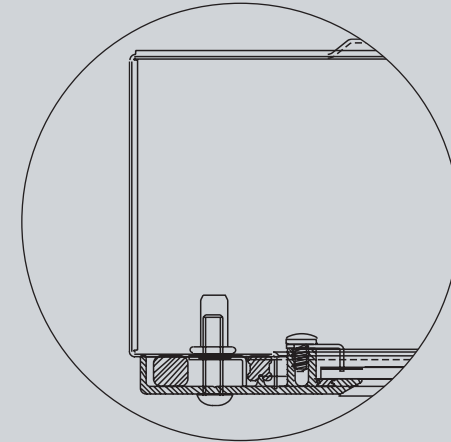

	Lampway	A (mm)	B (mm)	C (mm)	D (mm)
1/2 Lamp	14/24W T5			605	475
3/4 Lamp	14/24W T5			605	475
1/2 Lamp	28/54W T5	1205	500		
3/4 Lamp	28/54W T5	1205	500		
1/2 Lamp	28/54W T5	1505	600		
3/4 Lamp	35/49W T5	1505	600		

Inverted Prismatic Diffuser

Lampway	Nom Dims (mm)	Catalogue No.	Emergency Catalogue No.
1x28W TL5	1200x300	CRPS/HF/128/PP	CRPS/HF/128E1/PP
1x35W TL5	1500x300	CRPS/HF/135/PP	CRPS/HF/135E1/PP
2x28W TL5	1200x300	CRPS/HF/228/PP	CRPS/HF/228E1/PP
2x35W TL5	1500x300	CRPS/HF/235/PP	CRPS/HF/235E1/PP
3x14W TL5	600x600	CRPS/HF/314/PP	CRPS/HF/314E1/PP
3x28W TL5	1200x600	CRPS/HF/328/PP	CRPS/HF/328E1/PP
4x14W TL5	600x600	CRPS/HF/414/PP	CRPS/HF/414E1/PP
4x28W TL5	1200x600	CRPS/HF/428/PP	CRPS/HF/428E1/PP

Low Glare Louvre with Clear Diffuser

Lampway	Nom Dims (mm)	Catalogue No.	Emergency Catalogue No.
1x28W TL5	1200x300	CRPS/HF/128/WV	CRPS/HF/128E1/WV
1x35W TL5	1500x300	CRPS/HF/135/WV	CRPS/HF/135E1/WV
2x28W TL5	1200x300	CRPS/HF/228/WV	CRPS/HF/228E1/WV
2x35W TL5	1500x300	CRPS/HF/235/WV	CRPS/HF/235E1/WV
3x14W TL5	600x600	CRPS/HF/314/WV	CRPS/HF/314E1/WV
3x28W TL5	1200x600	CRPS/HF/328/WV	CRPS/HF/328E1/WV
4x14W TL5	600x600	CRPS/HF/414/WV	CRPS/HF/414E1/WV
4x28W TL5	1200x600	CRPS/HF/428/WV	CRPS/HF/428E1/WV

Prismatic with Clear Diffuser

Lampway	Nom Dims (mm)	Catalogue No.	Emergency Catalogue No.
1x28W TL5	1200x300	CRPS/HF/128/PPCP	CRPS/HF/128E1/PPCP
1x35W TL5	1500x300	CRPS/HF/135/PPCP	CRPS/HF/135E1/PPCP
2x28W TL5	1200x300	CRPS/HF/228/PPCP	CRPS/HF/228E1/PPCP
2x35W TL5	1500x300	CRPS/HF/235/PPCP	CRPS/HF/235E1/PPCP
3x14W TL5	600x600	CRPS/HF/314/PPCP	CRPS/HF/314E1/PPCP
3x28W TL5	1200x600	CRPS/HF/328/PPCP	CRPS/HF/328E1/PPCP
4x14W TL5	600x600	CRPS/HF/414/PPCP	CRPS/HF/414E1/PPCP
4x28W TL5	1200x600	CRPS/HF/428/PPCP	CRPS/HF/428E1/PPCP

Low Brightness Louvre with Clear Diffuser

Lampway	Nom Dims (mm)	Catalogue No.	Emergency Catalogue No.
1x28W TL5	1200x300	CRPS/HF/128/X	CRPS/HF/128E1/X
1x35W TL5	1500x300	CRPS/HF/135/X	CRPS/HF/135E1/X
2x28W TL5	1200x300	CRPS/HF/228/X	CRPS/HF/228E1/X
2x35W TL5	1500x300	CRPS/HF/235/X	CRPS/HF/235E1/X
3x14W TL5	600x600	CRPS/HF/314/X	CRPS/HF/314E1/X
3x28W TL5	1200x600	CRPS/HF/328/X	CRPS/HF/328E1/X
4x14W TL5	600x600	CRPS/HF/414/X	CRPS/HF/414E1/X
4x28W TL5	1200x600	CRPS/HF/428/X	CRPS/HF/428E1/X

Asymmetric Low Glare Louvre with Clear Diffuser

Lampway	Nom Dims (mm)	Catalogue No.	Emergency Catalogue No.
1x28W TL5	1200x300	CRPS/HF/128/WVA	CRPS/HF/128E1/WVA
1x35W TL5	1500x300	CRPS/HF/135/WVA	CRPS/HF/135E1/WVA
2x28W TL5	1200x300	CRPS/HF/228/WVA	CRPS/HF/228E1/WVA
2x35W TL5	1500x300	CRPS/HF/235/WVA	CRPS/HF/235E1/WVA