




**SSD BULKHEAD** LED

An IP54 LED surface mounted bulkhead for exterior and interior lighting applications.

- Available with integral maintained emergency lighting packs.
- Predicted lifetime >50,000 hours.

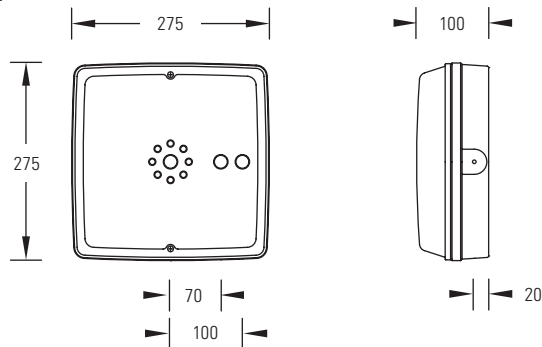

| Catalogue No. | Colour | LED Flux (Lumens) | Luminaire Flux (Lumens) | LED Wattage | Total System Wattage | Luminaire Lumens / Circuit Watt | Colour Temp | CRI | Weight (Kg) |
|---------------|--------|-------------------|-------------------------|-------------|----------------------|---------------------------------|-------------|-----|-------------|
| SSDW/1750/4K  | White  | 1900              | 1505                    | 11.2        | 12.9                 | 116.8                           | 4000K       | >80 | 1.5         |
| SSDW/2400/4K  | White  | 2500              | 1980                    | 16.5        | 19.0                 | 104.3                           | 4000K       | >80 | 1.5         |
| SSDW/3500/4K  | White  | 3500              | 2772                    | 22.5        | 25.9                 | 107.1                           | 4000K       | >80 | 1.5         |
| SSDB/1750/4K  | Black  | 1900              | 1505                    | 11.2        | 12.9                 | 116.8                           | 4000K       | >80 | 1.5         |
| SSDB/2400/4K  | Black  | 2500              | 1980                    | 16.5        | 19.0                 | 104.3                           | 4000K       | >80 | 1.5         |
| SSDB/3500/4K  | Black  | 3500              | 2772                    | 22.5        | 25.9                 | 107.1                           | 4000K       | >80 | 1.5         |

**SPECIFICATION**

- Body:** IP54 polycarbonate in white or black.
- Gear Tray:** Hinged powder coated steel gear tray.
- Diffuser:** Satine polycarbonate specially developed for use with LEDs.
- Nightlight/ Emergency:** Centrally mounted LED on a separate circuit can be used for nightlighting (120 lumens) and/or non maintained emergency use (120 lumens). Also available in self test emergency versions on request:  
 Add suffix '**N**' to specify nightlight: e.g. SSDB/1750**N**/4K  
 Add suffix '**E**' to specify emergency: e.g. SSDB/1750**E**/4K  
 Add suffix '**EN**' to specify emergency and nightlight: e.g. SSDB/1750**EN**/4K  
 Add suffix '**ES**' to specify self test emergency: e.g. SSDB/1750**ES**/4K/OP  
 Add suffix '**ED**' to specify DALI reporting emergency: e.g. SSDB/1750**ED**/4K/OP
- Dimmable Drivers:** Options of fixed output (standard), DALI or Switchdim control.  
 Add suffix '**D**' to specify DALI driver or suffix '**DW**' to specify Switchdim: e.g. SSDB/1750**D**/4K/PD or SSDB/2400**DW**/4K/PD
- Fixing/Cable Entry:** 2 x 20mm knock outs and BESA fixing in black. Option for side conduit entry.
- Warranty:** Standard ITAB Prolight LED warranty (see page 161).