SAINT LED

A range of decorative wall or ceiling mounted, circular LED luminaires with a back light halo effect. Designed for general purpose use in corridors, staircases, entrance areas, toilets and stores.

- All diffusers are manufactured from polycarbonate and emergency versions are suitable for defined escape routes and comply with 850°C hot wire test.
- Predicted lifetime >50,000 hours.

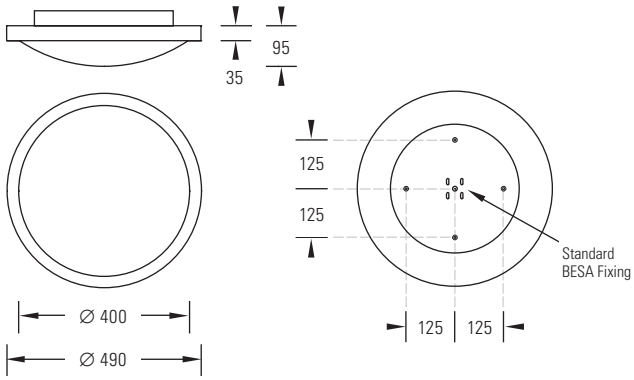

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
Straight									
SNT/1750/4K/O/SWH	∅ 490	1900	1499	11.2	12.9	116.4	4000K	>80	2.7
SNT/2400/4K/O/SWH	∅ 490	2500	1973	16.5	19.0	104.0	4000K	>80	2.7
SNT/3500/4K/O/SWH	∅ 490	3500	2762	22.5	25.9	106.7	4000K	>80	2.7
Curved									
SNT/1750/4K/O/CWH	∅ 490	1900	1499	11.2	12.9	116.4	4000K	>80	2.7
SNT/2400/4K/O/CWH	∅ 490	2500	1973	16.5	19.0	104.0	4000K	>80	2.7
SNT/3500/4K/O/CWH	∅ 490	3500	2762	22.5	25.9	106.7	4000K	>80	2.7

SPECIFICATION

Body: Polycarbonate with clip on straight or curved spun aluminium trim, finished in epoxy powder coated white (RAL9010). Other colours on request.

Diffuser: Opal Polycarbonate

Trim: For silver (RAL9006) trim, replace 'WH' in the catalogue number with **'SG'**: e.g. SNT/1750/4K/O/S**SG**

Nightlight/ Emergency: Centrally mounted LED on a separate circuit can be used for nightlighting (120 lumens) and/or non maintained emergency use (120 lumens). Also available in self test emergency versions on request:
Add suffix **'N'** to specify nightlight: e.g. SNT/1750**N**/4K/O/SWH
Add suffix **'E'** to specify emergency: e.g. SNT/1750**E**/4K/O/SWH
Add suffix **'EN'** to specify emergency and nightlight: e.g. SNT/1750**EN**/4K/O/SWH
Add suffix **'ES'** to specify self test emergency: e.g. SNT/1750**ES**/4K/O/SWH
Add suffix **'ED'** to specify DALI reporting emergency: e.g. SNT/1750**ED**/4K/O/SWH

Dimmable Drivers: Option of fixed output (standard), DALI or Switchdim control.
Add suffix **'D'** to specify DALI driver or suffix **'DW'** to specify Switchdim: e.g. SNT/1750**D**/4K/O/SWH or SNT/1750**DW**/4K/O/SWH

Warranty: Standard ITAB Prolight LED warranty (see page 161).