




SLEEK LED

An elegant wall mounted luminaire which provides direct light and a wash of light across the ceiling from the upward element. Available in two different lengths (610mm and 900mm) as standard with lumen packages ranging from 4,600 up to over 12,000.

- Slim line direct/indirect wall mounted luminaire.
- Colour rendering index Ra >80.
- Colour temperature – available in 3000K and 4000K versions.
- Predicted lifetime >50,000 hours.
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty (see page 161).

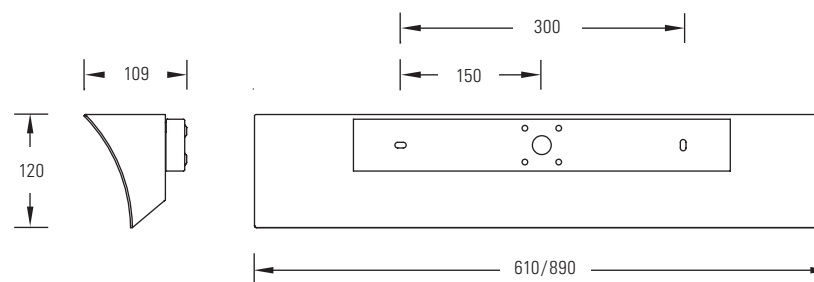

Catalogue No.	Nominal Length (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	Weight (Kg)
SLK/06/F/048/3K	600	4800	4608	29.2	32.3	142.7	3000K	3.5
SLK/06/F/048/4K	600	4800	4608	27.4	30.2	152.6	4000K	3.5
SLK/06/F/080/3K	600	8000	7680	49.6	54.6	140.7	3000K	3.5
SLK/06/F/080/4K	600	8000	7680	46.6	52.2	147.1	4000K	3.5
SLK/09/F/072/3K	900	7200	6912	43.8	49.0	141.1	3000K	4.5
SLK/09/F/072/4K	900	7200	6912	41.1	44.9	153.9	4000K	4.5
SLK/09/F/120/3K	900	12000	11520	74.4	78.6	146.6	3000K	4.5
SLK/09/F/120/4K	900	12000	11520	70.0	75.9	151.8	4000K	4.5

Dimmable Drivers: To specify DALI driver replace 'F' in catalogue number with 'X': e.g. SLK/06/X/48/4K
 To specify DALI driver wired for Switchdim operation replace 'F' in catalogue number with 'S': e.g. SLK/09/S/120/4K