



STRING LED

A linear LED 3 circuit track (Track NL – Pages 30-32) or surface mounted luminaire ideal for providing ambient lighting in retail or general areas.

- 1450mm extruded aluminium body for optimal heat sinking.
- Wide angled distribution, PMMA moulded opalised diffusers available in 2 options: Flat or B-shaped
- Colour rendering index Ra >80.
- Predicted lifetime >50,000 hours.
- Colour temperature – available in 3000K and 4000K versions.
- Photometric data available in Eulumdat format on request or via Relux website.
- No UV or IR emissions.
- Standard ITAB Prolight LED warranty (see page 161).

Catalogue No.	Mounting	Optic	LED Flux (Lumens)	Luminaire Flux (Lumens)	LED Wattage	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI
NOR/227-101-101-4K	Ceiling	B-shape	6305	5586	44	51.2	109	4000K	>80
NOR/227-101-102-4K	Ceiling	Flat	6305	5706	44	51.2	111	4000K	>80
NOR/227-101-001-4K	Track	B-shape	6305	5586	44	51.2	109	4000K	>80
NOR/227-101-002-4K	Track	Flat	6305	5706	44	51.2	111	4000K	>80

For colour 3000 Kelvin, replace '4K' the catalogue number with '3K': e.g. NOR/227-101-001-3K
 For ceiling mount plate please specify: NOR/227-201-001

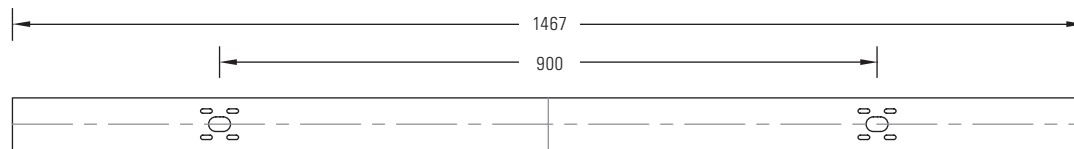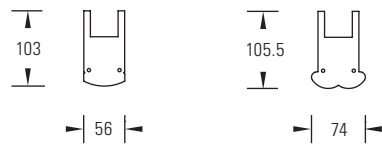

Fixing details for surface mounted version