



## WELLINGTON


LED

A contemporary, direct distribution, LED pendant.

- 1200 or 1700mm linear versions with special LED opalised polycarbonate TP(a) diffusers.
- Provides a blade of light effect.
- Body in white (RAL9010) with stainless steel adjustable suspensions. Other mounting options on request.
- Available in fixed output, DALI or Switchdim operation.
- Colour rendering index Ra >80.
- Colour temperature – available in 3000K and 4000K versions.
- Predicted lifetime >50,000 hours.
- No ultra violet or infra red emissions.
- Standard and self test 3 hour maintained emergency conversions are available.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty (see page 161).

### SPECIFICATION

- Body:** Powder coated welded steel in white as standard. Other colours are available on request.
- Diffuser:** Specially developed opalised polycarbonate which delivers high transmission and excellent diffusion eliminating LED spotting.
- Drivers:** Option of fixed output or DALI (wired for DALI or Switchdim operation).  
 Replace suffix 'F' in the catalogue number with 'X': e.g. WEL/12/X/26/4K  
 Replace suffix 'F' in the catalogue number with 'S': e.g. WEL/17/S/66/4K
- Emergency:** **E** Integral maintained 3-hour duration emergency lighting conversion packs are available for all options.  
**ES** Self Test Emergency.  
 To specify required option substitute relevant code into catalogue number:  
 e.g. WEL/12/F/26E/3K
- Suspensions:** Adjustable steel wire suspensions.  
 Please specify required length to nearest metre.

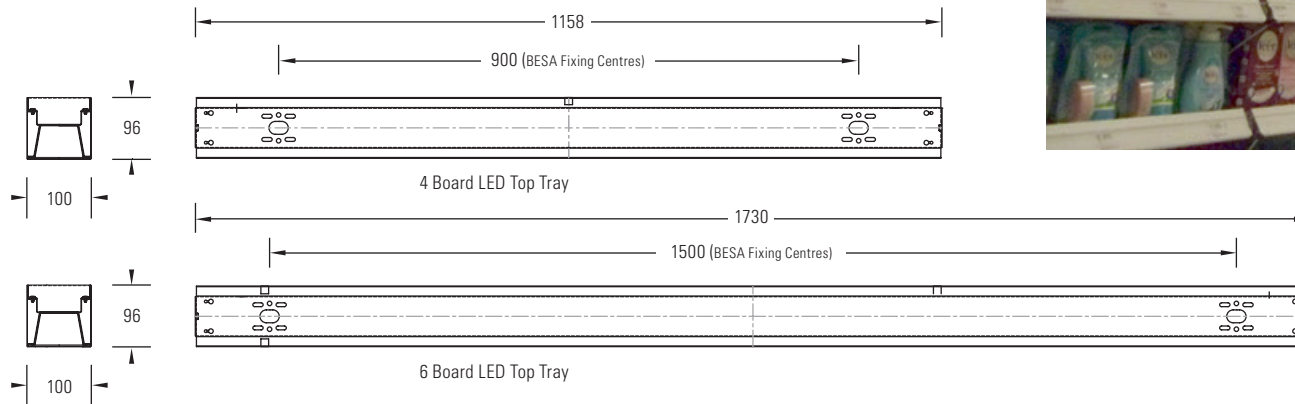

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
WEL/12/F/26/3K	1200x100	2560	1587	18.5	85.8	3000K	>80	6.5
WEL/12/F/44/3K	1200x100	4280	2654	29.5	90.0	3000K	>80	6.5
WEL/12/F/26/4K	1200x100	2600	1612	18.5	87.1	4000K	>80	6.5
WEL/12/F/44/4K	1200x100	4400	2728	29.5	92.5	4000K	>80	6.5

Catalogue No.	Nominal Dimensions (mm)	LED Flux (Lumens)	Luminaire Flux (Lumens)	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
WEL/17/F/39/3K	1700x100	3840	2381	27.7	86.0	3000K	>80	8.7
WEL/17/F/66/3K	1700x100	6420	3980	44.2	90.0	3000K	>80	8.7
WEL/17/F/39/4K	1700x100	3900	2418	27.7	87.3	4000K	>80	8.7
WEL/17/F/66/4K	1700x100	6600	4092	44.2	92.6	4000K	>80	8.7

**Dimmable Drivers:** To specify DALI driver replace 'F' in the catalogue number with 'X': e.g. WEL/12/X/26/4K  
 To specify DALI driver wired for Switchdim operation replace 'F' in the catalogue number with 'S': e.g. WEL/17/S/66/4K  
**Emergency Conversion:** To specify 3 hour maintained emergency packs, add 'E' to the catalogue number: e.g. WEL/12/F/26E/3K  
**Self Test Emergency Conversion:** To specify 3 hour maintained emergency packs, add 'ES' to the catalogue number: e.g. WEL/17/F/39ES/4K