



Colour options:




ZYLINDER / ZYLINDER MINI


LED

- Die cast aluminium track mounted spotlights.
- Zylinder ~ 2800 Lumens (luminaire output).
- Zylinder Mini ~ 1300 Lumens (luminaire output)
- Interchangeable optics, available in spot, medium and flood distributions.
- Colour rendering index = 90+
- Colour temperature – available in 3000K and 4000K versions.
- Electronic drivers.
- Universal 3 circuit track adaptor.
- Available in white, black or grey.
- Predicted lifetime >50,000 hours.
- Standard ITAB Prolight LED warranty (see page 161).

Zylinder

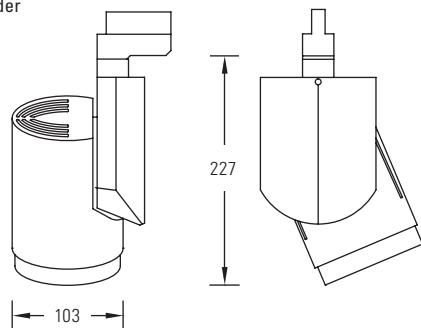

Zylinder Mini

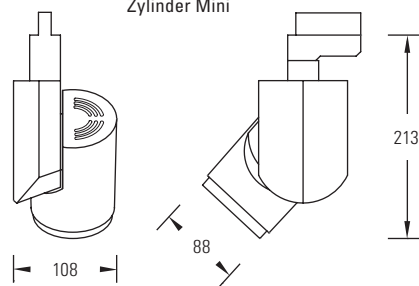

Catalogue No.	Housing	Colour	Distribution	Luminaire Flux (Lumens)	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Weight (Kg)
NOR/288-500-10-3K	Zylinder	White	Spot (14°)	2736	30	91	3000K	90+	1.2
NOR/288-500-20-3K	Zylinder	Black	Spot (14°)	2736	30	91	3000K	90+	1.2
NOR/288-500-30-3K	Zylinder	Grey	Spot (14°)	2736	30	91	3000K	90+	1.2
NOR/288-501-10-3K	Zylinder	White	Medium (28°)	2810	30	94	3000K	90+	1.2
NOR/288-501-20-3K	Zylinder	Black	Medium (28°)	2810	30	94	3000K	90+	1.2
NOR/288-501-30-3K	Zylinder	Grey	Medium (28°)	2810	30	94	3000K	90+	1.2
NOR/288-502-10-3K	Zylinder	White	Flood (39°)	2757	30	92	3000K	90+	1.2
NOR/288-502-20-3K	Zylinder	Black	Flood (39°)	2757	30	92	3000K	90+	1.2
NOR/288-502-30-3K	Zylinder	Grey	Flood (39°)	2757	30	92	3000K	90+	1.2
NOR/239-504-10-3K	Zylinder Mini	White	Spot (15°)	1300	14	93	3000K	90+	0.76
NOR/239-504-20-3K	Zylinder Mini	Black	Spot (15°)	1300	14	93	3000K	90+	0.76
NOR/239-504-30-3K	Zylinder Mini	Grey	Spot (15°)	1300	14	93	3000K	90+	0.76
NOR/239-505-10-3K	Zylinder Mini	White	Medium (25°)	1300	14	93	3000K	90+	0.76
NOR/239-505-20-3K	Zylinder Mini	Black	Medium (25°)	1300	14	93	3000K	90+	0.76
NOR/239-505-30-3K	Zylinder Mini	Grey	Medium (25°)	1300	14	93	3000K	90+	0.76
NOR/239-506-10-3K	Zylinder Mini	White	Flood (33°)	1300	14	93	3000K	90+	0.76
NOR/239-506-20-3K	Zylinder Mini	Black	Flood (33°)	1300	14	93	3000K	90+	0.76
NOR/239-506-30-3K	Zylinder Mini	Grey	Flood (33°)	1300	14	93	3000K	90+	0.76

To specify colour 4000K replace '3K' in the catalogue number with '4K': e.g. NOR/239-505-10-4K