


T5 BATTENS


TL5

- A range of low profile surface mounted, TL5 fluorescent battens with a wide choice of attachments and lamp types.
- All versions also available with integral emergency packs.



| Lamp | Overall Length | Fixing Centres |
|-------------|----------------|----------------|
| | A | B |
| 14W/24W | 576mm | 445mm |
| 21W/39W | 876mm | 745mm |
| 28W/54W | 1176mm | 1045mm |
| 35W/49W/80W | 1476mm | 1345mm |

| Lampway | Nom Length (mm) | Catalogue No. | Weight (kg) | Emergency Catalogue No. | Weight (kg) |
|-----------|-----------------|----------------|-------------|-------------------------|-------------|
| 1x28W TL5 | 1200 | BDXTA5/HF/1028 | 2.5 | BDXTA5/HF/1028E1 | 3.3 |
| 1x35W TL5 | 1500 | BDXTA5/HF/1035 | 2.7 | BDXTA5/HF/1035E1 | 3.5 |
| 1x54W TL5 | 1200 | BDXTA5/HF/1054 | 2.5 | BDXTA5/HF/1054E1 | 3.3 |
| 1x49W TL5 | 1500 | BDXTA5/HF/1049 | 2.7 | BDXTA5/HF/1049E1 | 3.5 |
| 1x80W TL5 | 1500 | BDXTA5/HF/1080 | 2.7 | BDXTA5/HF/1080E1 | 3.5 |
| 2x28W TL5 | 1200 | BDXTA5/HF/2028 | 2.7 | BDXTA5/HF/2028E1 | 3.5 |
| 2x35W TL5 | 1500 | BDXTA5/HF/2035 | 2.9 | BDXTA5/HF/2035E1 | 3.7 |
| 2x54W TL5 | 1200 | BDXTA5/HF/2054 | 2.7 | BDXTA5/HF/2054E1 | 3.5 |
| 2x49W TL5 | 1500 | BDXTA5/HF/2049 | 2.9 | BDXTA5/HF/2049E1 | 3.7 |
| 2x80W TL5 | 1500 | BDXTA5/HF/2080 | 2.9 | BDXTA5/HF/2080E1 | 3.7 |

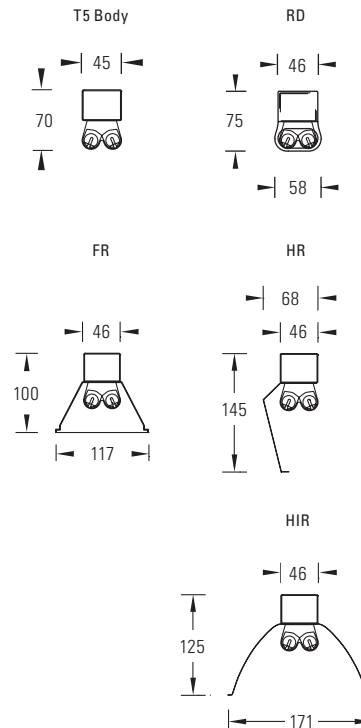

SPECIFICATION

Body: Sturdy construction finished in epoxy powder coated White (RAL9016) as standard.

Attachments: To specify attachment, add relevant suffix:

- RD** Reeded TP(a) Diffuser
- FR** Full Reflector
- HR** Half Reflector – Asymmetric
- HIR** High Rack Reflector

To specify required option substitute relevant code into catalogue number: e.g. BDXTA5/HF/2035/**FR**

Control Gear: **HF** High Frequency Electronic (standard)

- HDP** Philips 1-10V Analogue
- HTCS** Tridonic ECO Digital Switchdim
- HDPT** Philips Digital Touch and Dim
- HTCD** Tridonic ECO Digital DSI
- HTXD** Tridonic EXCEL one4all Digital DSI or DALI
- HDPD** Philips Digital DALI

To specify required option substitute relevant code into catalogue number: e.g. BDXTA5/**HTCS**/2058

Emergency: **E1** Integral, maintained, 3 hour duration emergency lighting conversion packs are available for all options.

ES Self Test Emergency.
To specify required option substitute relevant code into catalogue number: e.g. BDXTA5/HF/2028**ES**